

RT-LINEAR FL SERIES

LED Flood Light



LM-79



Features:


50w 100w 150w 200w 300w DLC ETL listed up to 800w LED flood light features:

- 1. Patented design, private tool product
- 2. Can be used as flood light, wall washer, linear high bay.
- 3. Multi-angle: 40°, 60°, 90°, 150x75° available
- 4. AC100V-277V and AC 220-480V available
- 5. Housing color: white and black
- 6. Indoor /Outdoor light use, IP67
- 7. ETL DLC certificated, 7 years warranty



RT-LINEAR FL SERIES

Light Distribution Curve

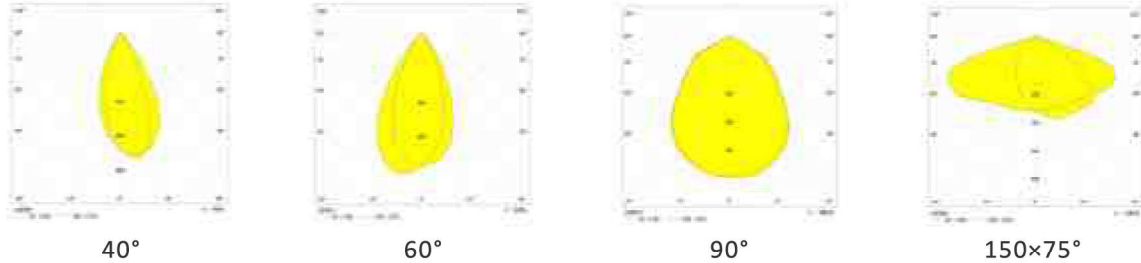

Parameter

Model No.	LT-F285-50W	LT-F570-100W	LT-F855-150W	LT-F1135-200W	LT-F1416-300W	
Power Consumption	50W	100W	150W	200W	300W	
LED Chips	SMD3030					
CRI	Ra>70,Ra>80					
Luminous Flux	6750-7250lm 135-145lm/w	13500-14500lm 135-145lm/w	20250-21750lm 135-145lm/w	27000-29000lm 135-145lm/w	40500-43500lm 135-145lm/w	
Voltage	AC100~277V PF:>0.95 (AC220-480V 100W 150W 200W)					
IP Rating	IP67					
Color Temp	6000~6500K(CW)/4000~4500K(NW)/2700~3200K(WW)					
Beam Angles	40°,60°,90°,150x75°					
Warranty	7 years					
Fixture Painting	White/Black					
Working Temp	-20 ~ +45°C					
Life	50000H					
Model No.	LT-2F1135-400W	LT-2F1416-500W	LT-3F1135-500W	LT-3F1135-600W	LT-3F1416-700W	LT-3F1416-800W
Power Consumption	400W	500W	500W	600W	700W	800W
LED Chips	Philips (Cree XTE,SMD3030,Bridgelux 45mil optional)					
CRI	Ra>70,Ra>80					
Luminous Flux	54000-58000lm 135-145lm/w	67500-72500lm 135-145lm/w	67500-72500lm 135-145lm/w	81000-87000lm 135-145lm/w	94500-101500lm 135-145lm/w	108000-116000lm 135-145lm/w
Voltage	AC100~277V PF:>0.95					
IP Rating	IP67					
Color Temp	6000~6500K(CW)/4000~4500K(NW)/2700~3200K(WW)					
Beam Angles	(Philips,SMD3030,OSRAM:40°,60°,90°,150x75°),(Cree:100x90°,140x70°),(Bridgelux 45mil:15°,25°,40°,60°)					
Warranty	5years					
Fixture Painting	White/Black					
Working Temp	-20 ~ +40°C					
Life	50000H					